

# GeDET Project Review 2011

Burçin Dönmez for the GeDET Group

Max-Planck-Institut für Physik, München

December 20, 2011

- Motivation.
- Temperature dependence and axis determination for germanium detectors.
- GALATEA test stand.
- BEGe simulations.
- REGe background measurements.
- Aluminum as a background source.

**Director:** Allen Caldwell

**Project Leaders:** Iris Abt (GeDET), Béla Majorovits (GERDA)

**Postdocs:** Fabiana Cossavella, Burçin Dönmez, Christopher O'Shaugnessy, Oliver Schulz

**PhD Students:** Neslihan Becerici Schmidt, Sabine Irlbeck, Oleksandr Volynets

**Diploma Students:** Florian Faulstich (05/11), Aaron Michel

**Group Engineers:** Hans Seitz, Franz Stelzer


**Engineering:** Sven Vogt

Many thanks to the Walter Kosmale, Reinhard Hoffmann, Alex Wimmer, Martin Burrack and the colleagues from electronic and mechanic departments.

## Development of segmented n-type Germanium detectors for future applications.



### 1 Ton initiative:

- Push further down sensitivity
- Normal or inverted hierarchy?
- 1 Ton of enriched Ge
- Background index of  $10^{-5}$  counts/(kg y keV)



### Study of properties of Ge detectors:



- Surface events induced by  $\alpha$  and  $\beta$
- Pulse shapes to extract position information and event topologies
- New germanium detector geometries  $\rightarrow$  Segmented BEGe detectors



# Temperature dependence of pulse lengths

## Experimental Setup:


- A cylindrical true-coaxial 18-fold segmented n-type detector.
- The detector mounted either inside a vacuum cryostat (changing T), K1, or submerged in a liquid nitrogen volume (fixed T), GII.
- The detector was operated temperatures at 77 K and between 95 K to 130 K.

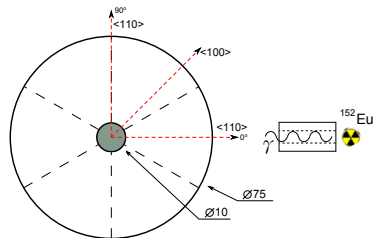

Ref. "Measurement of the temperature dependence of pulse lengths in an n-type germanium detector", I. Abt et al., Eur. Phys. J. Appl. Phys. 56 (2011)

10104.

# Temperature dependence of pulse lengths

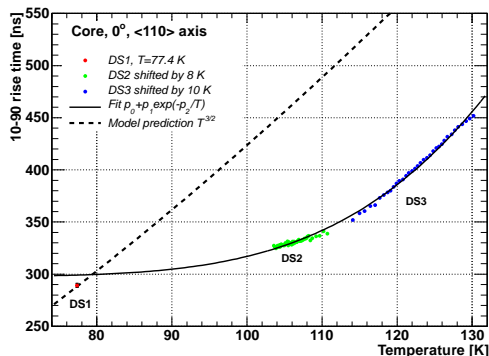

- Temperature dependence of the rise time should be taken into account when pulses are simulated.
- The detector was stable up to temperatures of 130 K!

## Expectation:

- If  $E \sim \text{const.}$   $\rightarrow$   
 $t_{\text{rise}} \propto \mu_{\text{eff}}^{-1}$ .
- $\mu_{\text{eff}} \propto T^{-3/2}$ .

## Measurement:

- Boltzmann-like law:  
 $t_{\text{rise}} \propto e^{-k/T}$ .
- Is something else T-dependent?



Ref. "Measurement of the temperature dependence of pulse lengths in an n-type germanium detector", I. Abt et al., Eur. Phys. J. Appl. Phys. 56 (2011)

10104.

## Axes determination - Measurement

- The orientation of the axes of a detector is important for any analysis where pulse shapes are used.
- The difference of the mobility of charge carriers along the "slow" and "fast" axes is significant, **longitudinal anisotropy**.
- Also, the path of charge carriers not drifting parallel to the crystal axes are bent, **transverse anisotropy**.



Azimuthal scan of the detector:

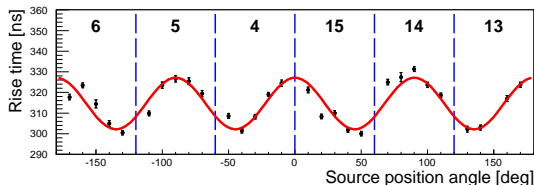

$$\phi_{\langle 110 \rangle} = 0.2^\circ \pm 0.4^\circ(\text{stat.}) \pm 0.7^\circ(\text{sys.}).$$

Ref. "Axes determination for segmented true-coaxial HPGe detectors", I. Abt et al., to be submitted.

## Axes determination - Simulation





- Measured and expected occupancies for the 1.33 MeV ( $^{60}\text{Co}$ ) line in the middle layer for the irradiation from the top.
- The resulting occupancies were evaluated by computing the quantity  $\epsilon$ ,  
$$\epsilon = \sum_i \frac{(D_i - S_i)^2}{D_i^2}.$$
- $\phi_{\langle 110 \rangle} = -1.8^\circ \pm 1.0^\circ(\text{stat.}) \pm 6.0^\circ(\text{syst.})$ , from all layers.

Ref. "Axes determination for segmented true-coaxial HPGe detectors", I. Abt et al., to be submitted.

# GALATEA test stand

- Scanning of detector surfaces with low energy  $\gamma$ ,  $\beta$ ,  $\alpha$  and laser
- understanding of surface events
  - investigation of dead layer properties

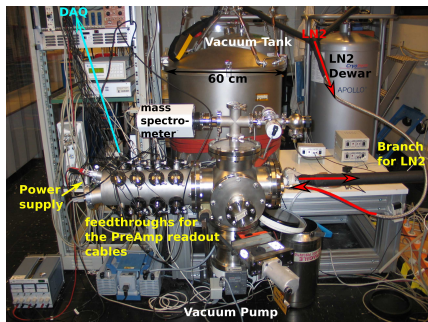



- First calibration data is collected in 2010 with 19-segment true-coaxial detector, SuSiE.
- We are currently working on improving vacuum, electronics and grounding of the setup.



## Non-segmented BEGe detectors

Non-segmented BEGe detectors are implemented in MaGe framework based on GEANT4.







BEGe detectors have special field distributions due to their contact geometry.  
→ Improved PSA capabilities.



We will receive first BEGe detectors for GERDA Phase II in 2012.



## Segmented BEGe detectors - In progress

- Segmented BEGe detectors are modelled in Maxwell. → Field results are imported to MaGe for pulse shape analysis.
- Improve PSA capabilities and understand systematics of segmentation.
- Use mirror charges induced on segments to extract event topologies.
- Find optimum configuration for segments.



# REGe background measurements

Monitoring natural background with two REGe detectors since the Fukushima incident.

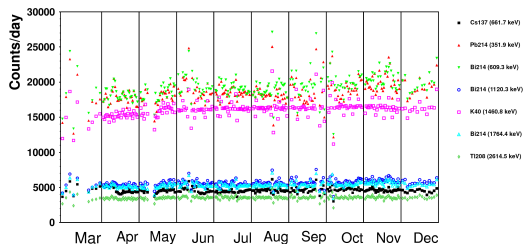

## Background from the decays of Aluminum

- Aluminum is commonly used to metalize (HPGe) detector surfaces.
- Great care is taken when selecting aluminum. → Cosmogenically produced  $^{26}\text{Al}$  is not removed during the refinement process.
- The  $^{22}\text{Na}$ ,  $^{26}\text{Al}$ ,  $^{226}\text{Ra}$  and  $^{228}\text{Th}$  contaminations were simulated on the metallized surfaces.
- It is shown that with a single segment cut background levels from aluminum is low enough to keep background level  $10^{-6}$  counts/(kg y keV).

Be careful when selecting aluminum, but it is not a show stopper!

Ref. "Aluminum as a source of background in low background experiments", B. Majorovits et al., NIMA 647 (2011) 39-45.

Investigation of systematic effects in HPGe detectors for future ton-scale experiments.

- Effect of temperature on pulse lengths are significant.
- Method developed for axes determination.
- BEGe pulse shape simulations are ongoing.
- Novel detector technologies are investigated.
- Understanding of background components.