
DHE circuitry is floating with respect to Belle Structure. Referencing is done towards Module DGND using DGND SENSE

Outer cable shield must be opend on PP side!

Drainwires can be optionally AC coupled to Transmitter ground or left open, on PP drain is connected to DGND

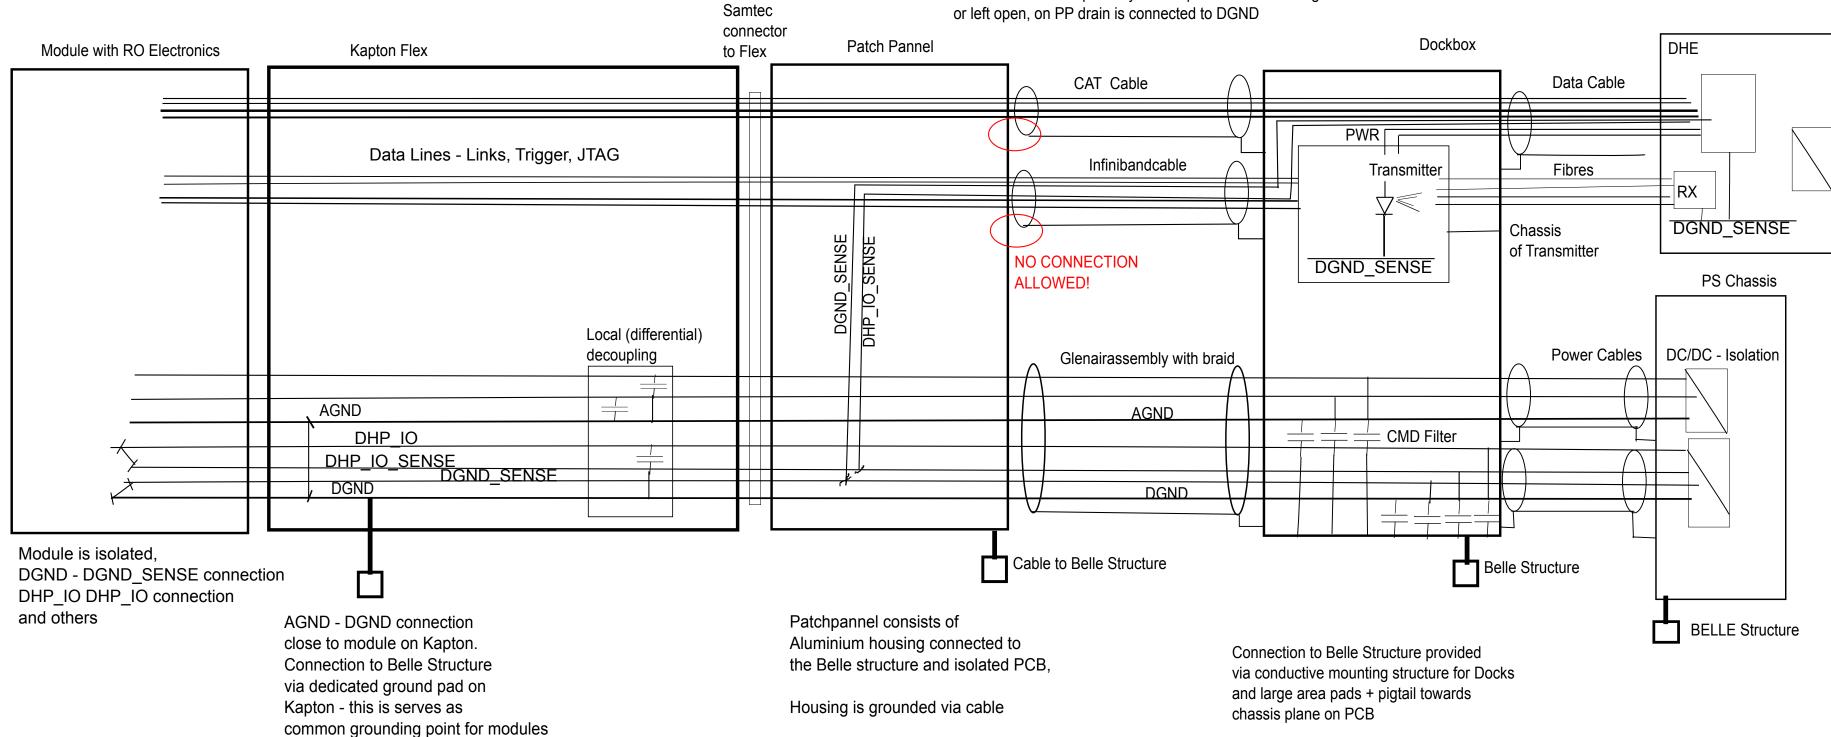

FWD or BWD side