


ATLAS style lectures series presents



The Belle and BelleII Experiments in Japan

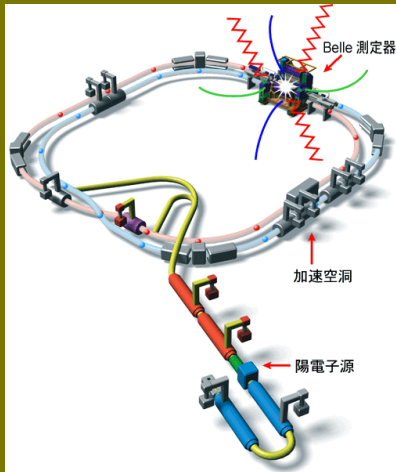

The Belle Experiment is an asymmetric e^+e^- collider situated in KEK Japan and its primary purpose is to study the CP-Violation and indirectly look for new physics


running on the Upsilon(4S)

center of mass = 10.58GeV

ATLAS style lectures series presents



The Belle at

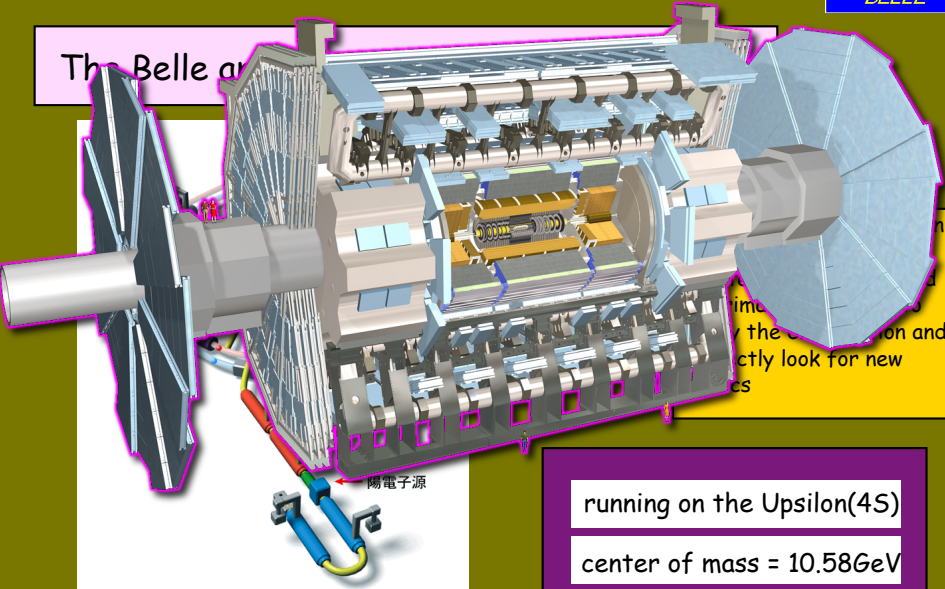

time
by the
ctly look for new
cs


running on the Upsilon(4S)
center of mass = 10.58GeV

Objective: Measure time dependent decay asymmetry of B and \bar{B} going to the same final state

$$a_{CP}(t) = \frac{\Gamma(\bar{B}^0 \rightarrow f_{CP}; t) - \Gamma(B^0 \rightarrow f_{CP}; t)}{\Gamma(\bar{B}^0 \rightarrow f_{CP}; t) + \Gamma(B^0 \rightarrow f_{CP}; t)}$$

3 possible contributions

- ▶ CP-Violation in decay (direct)
- ▶ CP-Violation in mixing (indirect)
- ▶ CP-Violation by interference of mixing and decay (mixing induced)

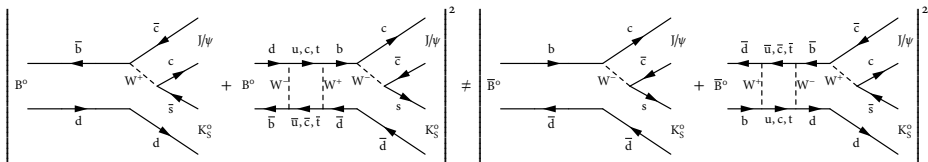



- ▶ For B mesons, contributions from indirect CP-Violation are negligible
- ▶ For many decays, loop diagrams contribute to the amplitudes
 ➡ possibility to indirectly detect new physics


Experimental challenging task:

- ▶ lifetime of B mesons is 1.5 ps
- ▶ flavour of B meson has to be known

Solution

- ▶ $\Upsilon(4S)$: coherent B-meson pair production
- ▶ one B to determine flavour (tag side), other B for CP measurement (CP side)
- ▶ boost system using asymmetric beam energies
 $t \rightarrow \Delta t = \frac{\Delta z}{\langle \beta \gamma \rangle c}$

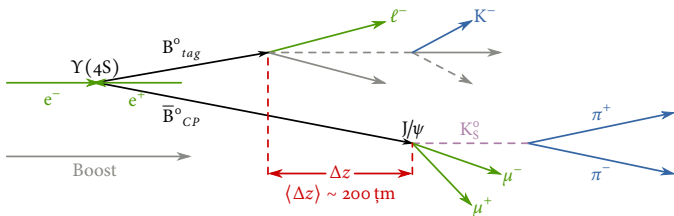

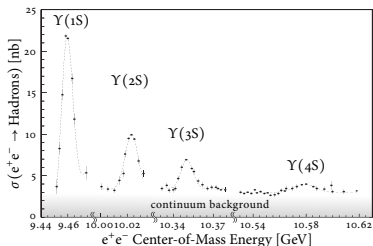

Best place to produce $B\bar{B}$ in a clean environment is at the $Y(4S)$:

- ▶ lowest energy with free B mesons
- ▶ 1/3 of all events are $B\bar{B}$
- ▶ possibility to “turn off” B production by lowering center of mass energy by 50 MeV

Differences to LHC


Energy is factor $\mathcal{O}(1000)$ smaller than for LHC:

- ▶ there are no real “jets”: we see single particles
- ▶ mean momentum of charged particles is around 500 MeV

Electron Collider:

- ▶ full knowledge about the center of mass frame
- ▶ no underlying events
- ▶ but: low cross section (more than factor 100)

Asymmetric e^+e^- experiment mainly at the $\Upsilon(4S)$ resonance (10.58 GeV)

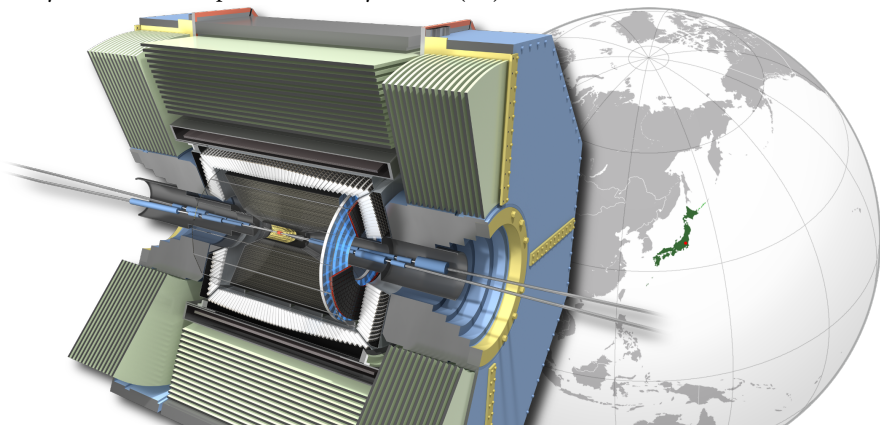

	KEKB/Belle	SuperKEKB/Belle II
operation	1999 – 2010	2014 –
peak luminosity	$2.11 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$	$8 \times 10^{35} \text{ cm}^{-2} \text{ s}^{-1}$
integrated luminosity	1023 fb^{-1} (772 million $B\bar{B}$ pairs)	50 ab^{-1}



Earthquake



Earth

Tsunami



Earth

Tsun

Nuclear meltdown



Earth

Tsun

Nucl

Tornado




Earth

Tsun

Nucl

Torn

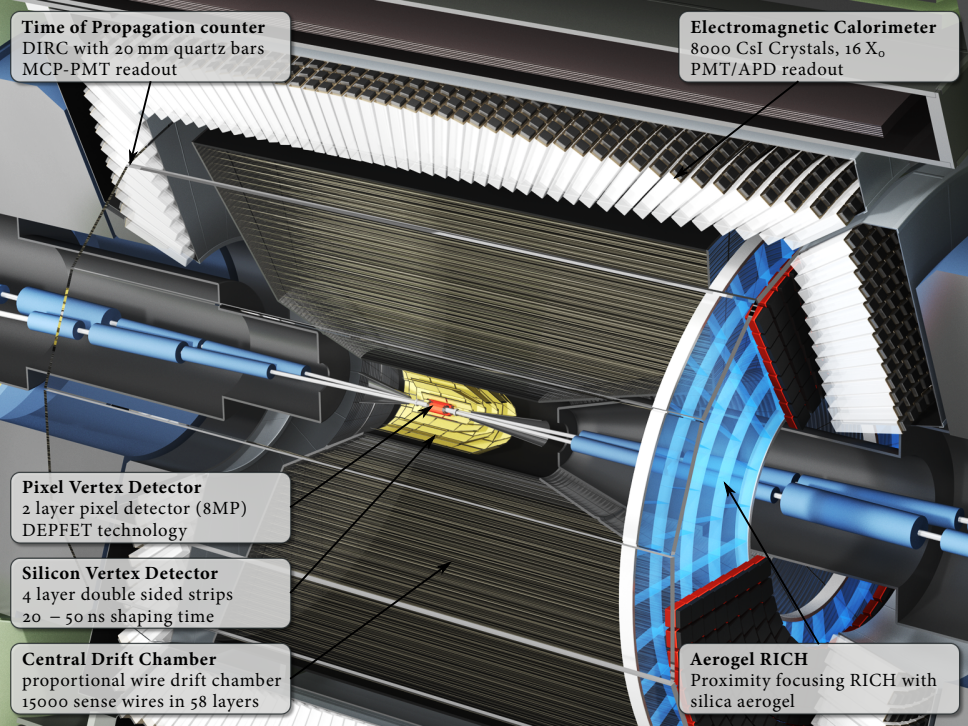

Time of Propagation counter
DIRC with 20 mm quartz bars
MCP-PMT readout

Electromagnetic Calorimeter
8000 CsI Crystals, 16 X_0
PMT/APD readout

Pixel Vertex Detector
2 layer pixel detector (8MP)
DEPFET technology

Silicon Vertex Detector
4 layer double sided strips
20 – 50 ns shaping time

Central Drift Chamber
proportional wire drift chamber
15000 sense wires in 58 layers

Aerogel RICH
Proximity focusing RICH with
silica aerogel



- ▶ no hadronic calorimeter needed due to low energy
- ▶ around 8000 CsI crystals: pure CsI in the endcaps, CsI(Tl) in the barrel
- ▶ crystals are expensive and will be reused from Belle
- ▶ good pointing and energy resolution

Earthquake

- ▶ During the earthquake, the Belle detector (1500 t) moved by 6 cm
 - ▶ but most probably it moved 20 cm in one direction and then came back
 - ▶ inner detector was already disassembled but crystals were still in
- ➔ so far tests show that crystals are still working





- ▶ no hadronic calorimeter needed due to low energy
- ▶ around 8000 CsI crystals: pure CsI in the endcaps, CsI(Tl) in the barrel
- ▶ crystals are expensive and will be reused from Belle
- ▶ good pointing and energy resolution


Earthquake

- ▶ During the earthquake, the Belle detector (1500 t) moved by 6 cm
 - ▶ but most probably it moved 20 cm in one direction and then came back
 - ▶ inner detector was already disassembled but crystals were still in
- ➔ so far tests show that crystals are still working



Good separation between Kaons and Pions is very important

- ▶ Momentum and dE/dx will be measured in the tracking system
- ▶ Use of Cherenkov detectors to measure speed of the particle

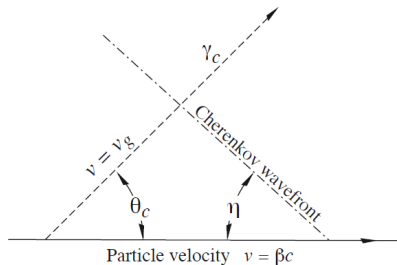

$$\cos \theta_c = (1/n\beta)$$


or

$$\tan \theta_c = \sqrt{\beta^2 n^2 - 1}$$


$$\approx \sqrt{2(1 - 1/n\beta)}$$


- ▶ Cherenkov light is the optical analogy to the sonic boom
- ▶ particles that are faster than the speed of light in a given medium emit cherenkov light
- ▶ direction of the light is dependent on β

DIRC = Detecton of internally reflected Cherenkov light

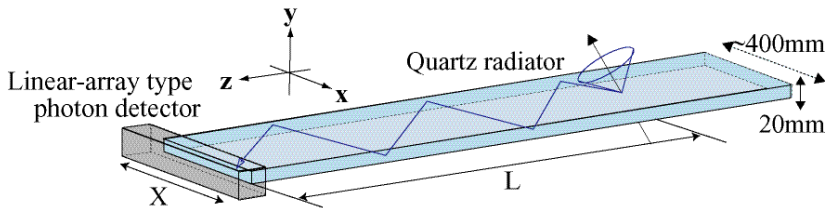

- ▶ array of rectangular quartz bars
- ▶ cherenkov light is reflected internally
- ▶ MCP-PMT array at the end will detect position and time
- ▶ 40 ps time resolution, $3\sigma K/\pi$ separation

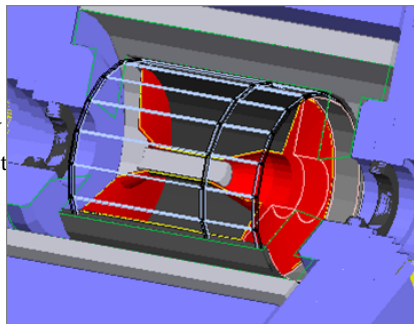

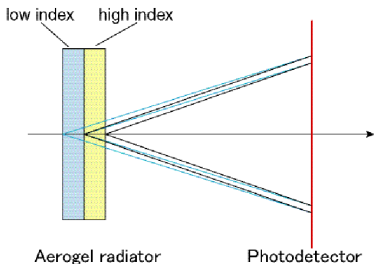

RICH = Ring Imaging Cherenkov Detector




- ▶ silica aerogel radiators used to create Cherenkov light
- ▶ light will form in circle screen
- ▶ two layers of different refractive materials used to produce focussed ring
- ▶ 4σ K/π separation

Silica Aerogel

- ▶ produced by drying silica gel in a specific way
- ▶ low density (world record at 1.9 mg/cm^3)
- ▶ low refractive index





Wire Configuration

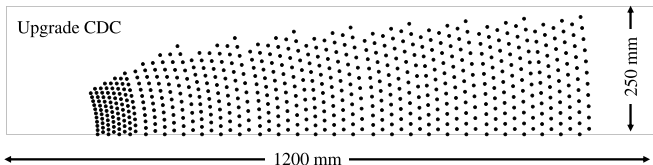


- ▶ wire chamber with ~ 15000 sense wires
- ▶ drift time \propto distance to wire
- ▶ position resolution of $\mathcal{O}(100 \mu\text{m})$
- ▶ stereo wires to get θ -information
- ▶ determination of particle momentum



Drift chamber also contributes to particle identification due to different energy losses for different kind of particles

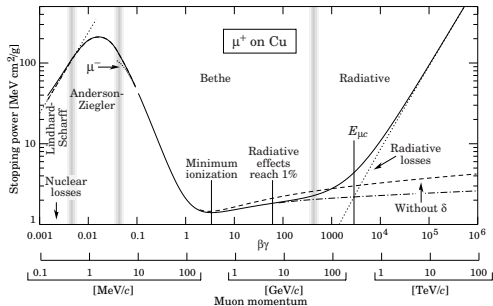


➡ Particle Identification uses the combined information of all sub detectors the particle traversed




- ▶ 4 layer double sided strip detector
- ▶ pitch of 50 μm resp. 160 μm
- ▶ shaping time of 20 – 50 ns

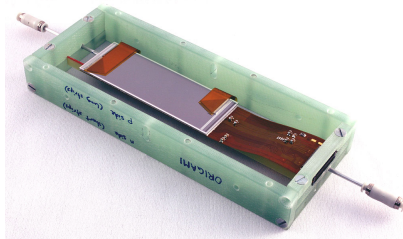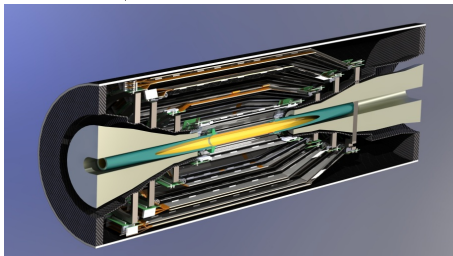

To reduce the material budget, the readout chips will be thinned down and put directly on the sensor


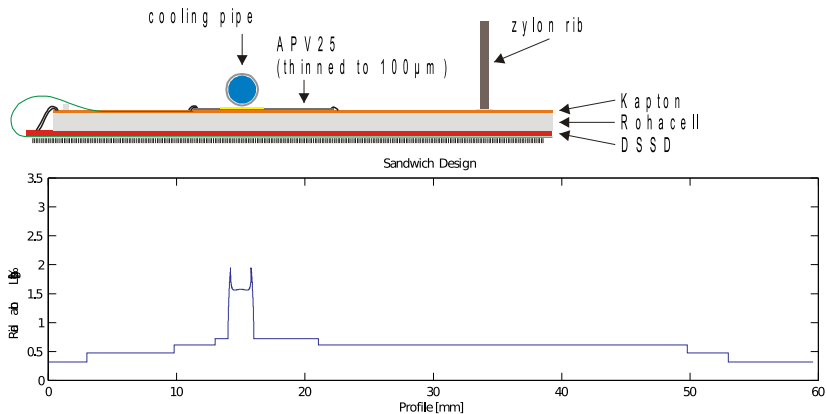


To reduce the material budget, the readout chips will be thinned down and put directly on the sensor

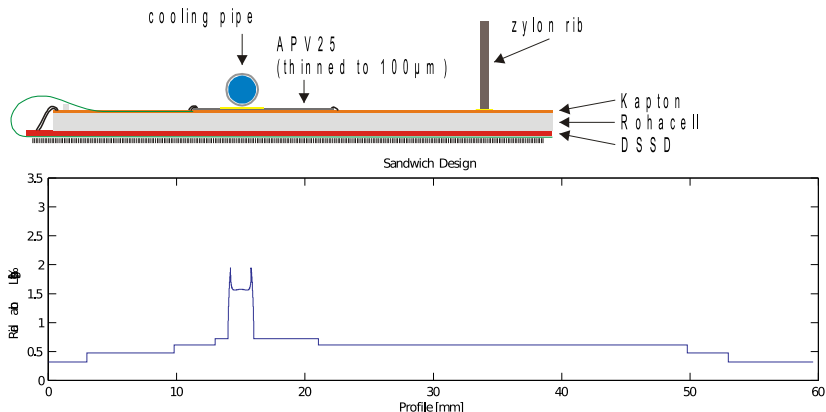

➡ they call it the “Batman-shape”

- ▶ innermost part of the detector
- ▶ 2 layer pixel detector (8M pixels)
- ▶ readout time of 20 ms
- ▶ data rate of 240 Gb/s = 30 GB/s
- ▶ pixel size of $50 \times 50 \text{ }\mu\text{m}$ and $50 \times 75 \text{ }\mu\text{m}$
- ▶ single track vertex resolution $\mathcal{O}(15 - 30 \text{ }\mu\text{m})$

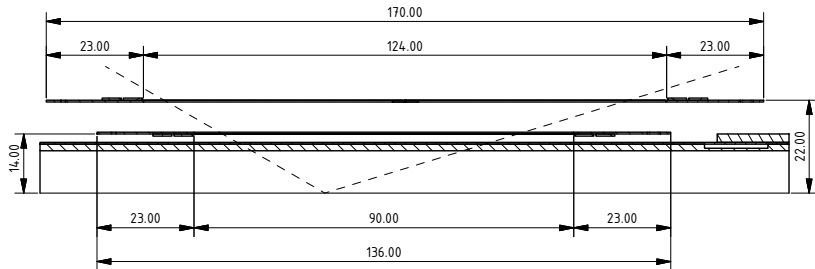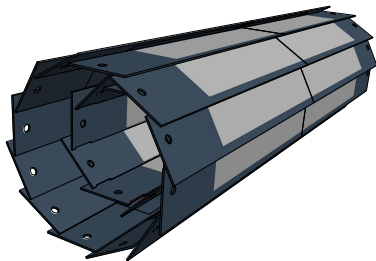


➡ PXD different design compared with existing Silicon detectors

- ▶ silicon sensors **self supporting**
- ▶ sensitive area will be thinned down to 75 μm
- ▶ almost no additional material inside of the acceptance

➡ total material budget of 0.28% X_0

But: Silicon is very brittle: Once there is a small crack, this crack can grow very easily

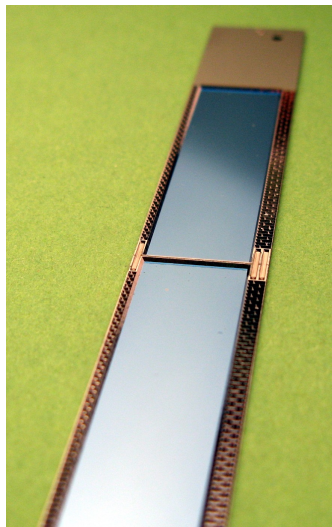


➡ PXD different design compared with existing Silicon detectors

- ▶ silicon sensors **self supporting**
- ▶ sensitive area will be thinned down to 75 μm
- ▶ almost no additional material inside of the acceptance

➡ total material budget of 0.28% X_0

But: Silicon is very brittle: Once there is a small crack, this crack can grow very easily

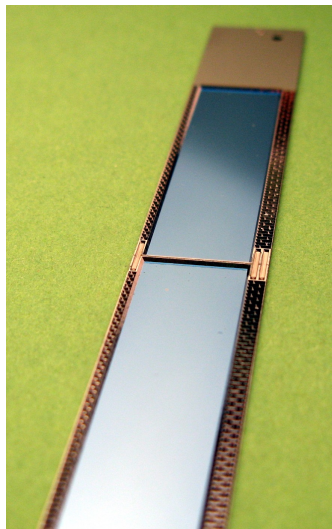





Belle/Belle II is a precision measurement focusing on the production of B mesons

- ▶ Center of Mass energy of 10.58 GeV
- ▶ boosted system to transform lifetime difference between the two B mesons into vertex difference
- ▶ very good vertex detector
- ▶ good identification of final state particles (K, π)

Belle II will increase the data sample of $B\bar{B}$ Events by a factor of 50


- ▶ opens possibilities to examine very rare decays
- ▶ will push sensitivity of CP measurements to a level to really challenge SM

The Comic-sans conclusions

- * Comic Sans and random colors is a nice optics for childrens birthdays
- * Studies show that Comic Sans can help readability for visually impaired persons
- * It is at least as overused as Papyrus
- * Every time you use it, a cute little kitten dies. You don't want to be responsible for dead kittens
- * Beamers suck at showing colors. Sometimes this is a blessing



Don't do it




Thank you
for your attention

- ▶ unitarity of CKM matrix leads to column constraints $\sum_k V_{ik} V_{jk}^* = 0$
- ▶ triangles in complex space
- ▶ almost degenerate in Kaon system, large angles in B meson system

$$V_{ud} V_{ub}^* + V_{cd} V_{cb}^* + V_{td} V_{tb}^* = 0$$

$\mathcal{O}(\lambda^3)$ $\mathcal{O}(\lambda^3)$ $\mathcal{O}(\lambda^3)$


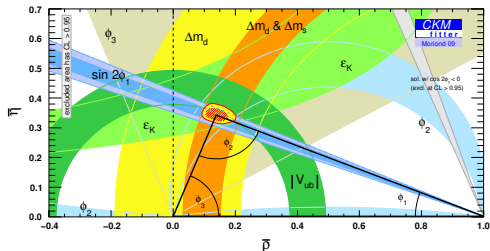


$$\bar{\rho} = \left(1 - \frac{\lambda^2}{2}\right) \rho \qquad \bar{\eta} = \left(1 - \frac{\lambda^2}{2}\right) \eta$$

$$\phi_1 = \arg\left(-\frac{V_{cd} V_{cb}^*}{V_{td} V_{tb}^*}\right) \qquad \phi_2 = \arg\left(-\frac{V_{td} V_{tb}^*}{V_{ud} V_{ub}^*}\right)$$

$$\phi_3 = \arg\left(-\frac{V_{ud} V_{ub}^*}{V_{cd} V_{cb}^*}\right)$$

Standard Silicon Detector for example ATLAS

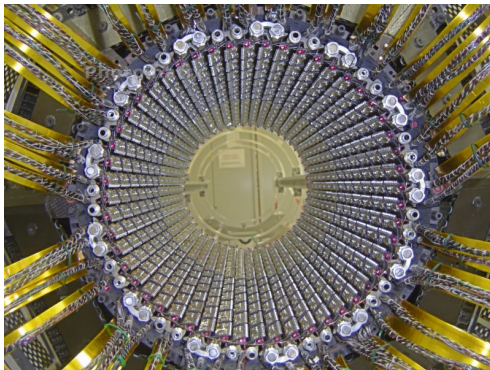

- ▶ multiple sensitive modules are glued on support ribs which provide mechanical stability
 - ▶ support, cooling and cables inside acceptance region (between 5% and 30% X_0)
- ➡ too much material for Belle II (10 GeV CM energy)